



## TEGERA® 722

Synthetic glove, nitrile, 3/4 dipped, polyester, 13 gg, smooth finish, Cat. II, white, yellow, water and oil repellent palm, for assembly work

### PROPERTIES

Flexible, good fit, light

### SPECIFICATION

TYPE OF GLOVE Work gloves - General handling

CATEGORY Cat. II

SIZE RANGE (EU) 6, 7, 8, 9, 10, 11

LINER MATERIAL Polyester, 13 gg

DIPPING 3/4 dipped

DIPPING MATERIAL Nitrile

DEXTERITY 5

GRIP PATTERN Smooth finish

CUFF STYLE Knitwrist cuff

LENGTH RANGE 220 - 270mm


COLOUR White, yellow

PAIRS PER PACKAGE/CARTON 12/120


DISPLAY Hook with hangtag

MATERIAL SPECIFICATION Nitrile 35%, polyester 65%

1(3)

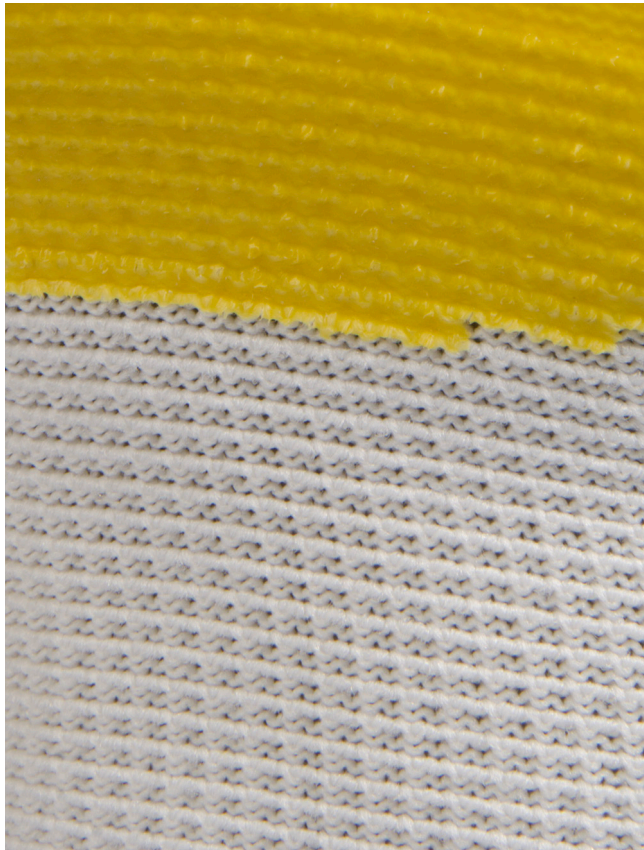

CE Cat. II



## TEGERA® 722

### FEATURES

Water and oil repellent palm and knuckle

### PREVENTS RISK OF

Abrasion injuries, grazes, scratches, lacerations, contact with dirt, contact with damp, contact with oil, contact with oil and fat

### PRIMARY ENVIRONMENTS OF USE

Wet environments, moist environments, oily and greasy environments, dirty environments

### PRIMARY AREAS OF USE

Fine assembly, assembly, inspection work, machine operating, building and construction, carpentry, installation work, construction, soil preparation, concrete work, engineering, transport work, machine driving, warehouse work, mining, wood industry work, sanitation

### PRIMARY INDUSTRIES OF USE

Agriculture, mining, machinery and equipment, MRO, automotive, transportation, utilities, building and construction

### TYPE OF WORK

Medium weight

2(3)

**ejendals**  
PROTECTING HANDS AND FEET

#### EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2018-08-30

## TEGERA® 722

### EC TYPE EXAMINATION

Notified Body: 0075 CTC, 4 rue Hermann Frenkel, 69367 Lyon Cedex 07 France

### COMPLIANCE DESCRIPTION

EN 420:2003 + A1:2009 Protective gloves - general requirements and test methods

EN 388:2003 Protective gloves against mechanical risks


Property	Level Achieved	(Maximum Performance)
A) Resistance to abrasion (No. of revolutions)	3	(4)
B) Resistance to cutting (Index)	1	(5)
C) Tear resistance (Newton)	2	(4)
D) Puncturing resistance (Newton)	2	(4)

EN 388 - Testing (specifies the requirements that apply for each safety level).

Level of protection/Performance level	1	2	3	4	5
A) Resistance to abrasion (No. of revolutions)	100	500	2 000	8 000	
B) Resistance to cutting (Index)	1,2	2,5	5,0	10,0	20,0
C) Tear resistance (Newton)	10	25	50	75	
D) Puncturing resistance (Newton)	20	60	100	150	



CE Cat. II



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2018-08-30

3(3)

**ejendals**  
PROTECTING HANDS AND FEET

**EJENDALS AB**

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com