

## JALAS® 1258 HEAVY DUTY

EN ISO 20345:2011, S3 SRC CI HRO HI

### PROPERTIES

Excellent grip, perfect fit, extra comfortable, excellent shock absorption

### SPECIFICATION

TYPE OF SHOE Safety footwear, low shoes

NAIL PROTECTION MATERIAL Steel

FITTING Regular

SIZE RANGE (EU) 35-48

COLLECTION Heavy Duty

PLATFORM Balance

UPPER MATERIAL PU-coated leather

UPPER MATERIAL THICKNESS 1.6.-1.8

PRONOSE MATERIAL PU

TOECAP MATERIAL Composite

LINING MATERIAL Polyester, polyamide

SOLE MATERIAL PU midsole, rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in Poron® XRD®

FASTENING Velcro®

COLOUR Black, blue



The product features remain unchanged only when insoles recommended by the manufacturer are used. All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2018-10-25

## JALAS® 1258 HEAVY DUTY

### FEATURES


ProNose toe reinforcement, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

### PREVENTS RISK OF

Toe injuries, nail penetration, antistatic

### PRIMARY ENVIRONMENTS OF USE

Outdoors, indoors, warm surfaces, environments with risk for outsole penetration, oily and greasy environments, dirty environments, harsh environments

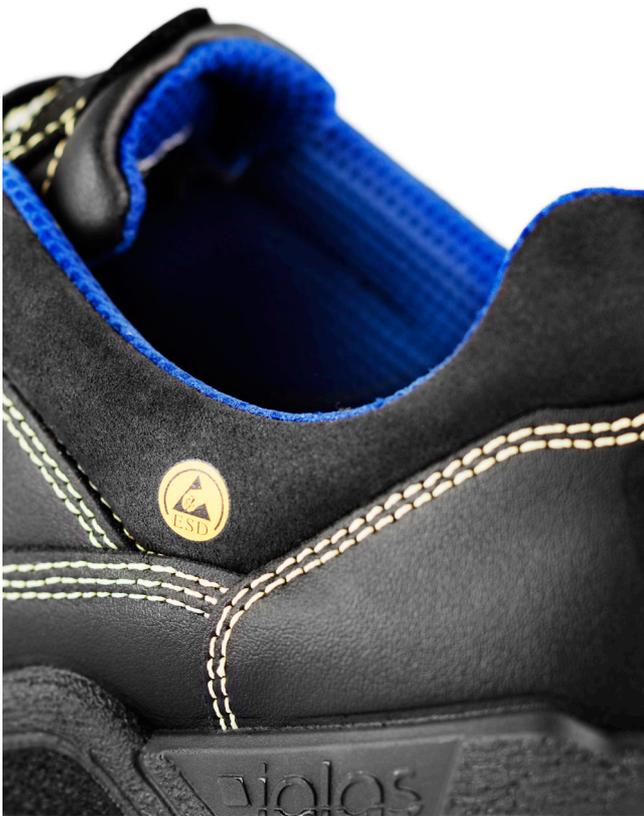

2(3)

CE



Composite toecap



Heat-resistant upper



Nail protection in steel



Anti-static properties



Heat-resistant outsole



ESD



Water repellent



Oil-resistant outsole



ProNose toe reinforcement



Ergothon Shock Absorption System

The product features remain unchanged only when insoles recommended by the manufacturer are used. All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2018-10-25

**ejendals**  
PROTECTING HANDS AND FEET

**EJENDALS AB**

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com

# JALAS® 1258 HEAVY DUTY

**COMPLIANCE**  
EN ISO 20345:2011

## COMPLIANCE DESCRIPTION

SB: Footwear with toe protection tested with 200 J impact and 15kN compression force (includes oil resistant outsole)

S1: Footwear made from leather and other materials excluding all-rubber or all-polymeric footwear + closed seat region + SB + A + E

S2: S1 + WRU

S3: S2 + P

WRU: Water-resistant upper

P: Penetration-resistant outsole

HRO: Heat-resistant outsole compound tested at 300°C

CI: Cold insulation

HI: Heat insulation

FO: Oil-resistant outsole

A: Electrical resistance (between 0.1-1000 Mega Ohms)

E: Energy absorption in the heel area (tested at 20 Joules)

SRA: Slip-resistance on ceramic tile floor with Sodium lauryl sulphate solution

SRB: Slip-resistance on steel floor with glycerol

SRC: SRA + SRB

IEC 61340-5-1: Electrostatic Discharge (ESD) resistance below 35 megaohm



CE



Composite toecap



Heat-resistant upper



Nail protection in steel



Anti-static properties



Heat-resistant outsole



ESD



Water repellent



Oil-resistant outsole



ProNose toe reinforcement



Ergothon Shock Absorption System

The product features remain unchanged only when insoles recommended by the manufacturer are used. All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2018-10-25

3(3)

**ejendals**  
PROTECTING HANDS AND FEET

**EJENDALS AB**

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com